


# BALL BEARING Sliding Door System

## Double Track for 6mm Float & 6.38mm Laminate Glass Panels

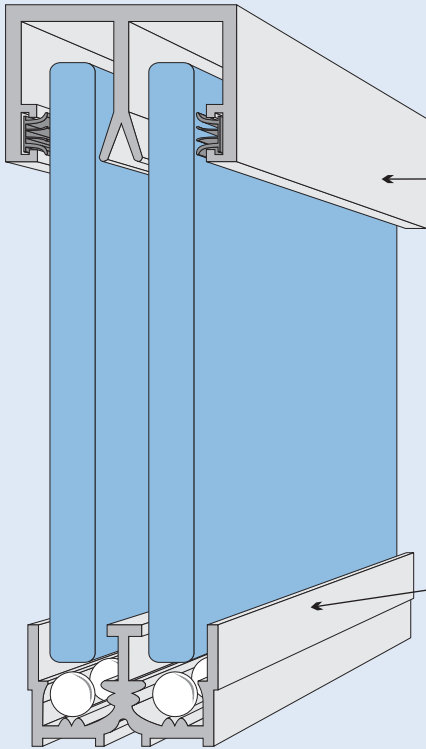

**DESIGNED FOR INTERNAL USE ONLY**

Stock extrusion length: 4500mm.  
Stock Finishes: Mill and Clear Anodised


**TT20** Aluminium Double Headguide  
With pile inserts - 4500mm Length


**RECOMMENDED GLASS SPECIFICATIONS:**

Maximum Sizes:  
**1.40 Sq mt each Panel**  
**1220mm High**  
Overlap: As desired  
All Edges to be polished and  
all corners to be rounded  
to 10mm radius


**TT415** Aluminium Double Track - 4500mm Length

**Optional Balls**

 **TT74** Nylon Balls - 6.35mmØ

 **TT77** Stainless Steel Balls - 6.35mmØ

**SUITABLE FOR  
NO MORE THAN  
ONE DOOR ON  
EACH SIDE OF  
THE TRACK**

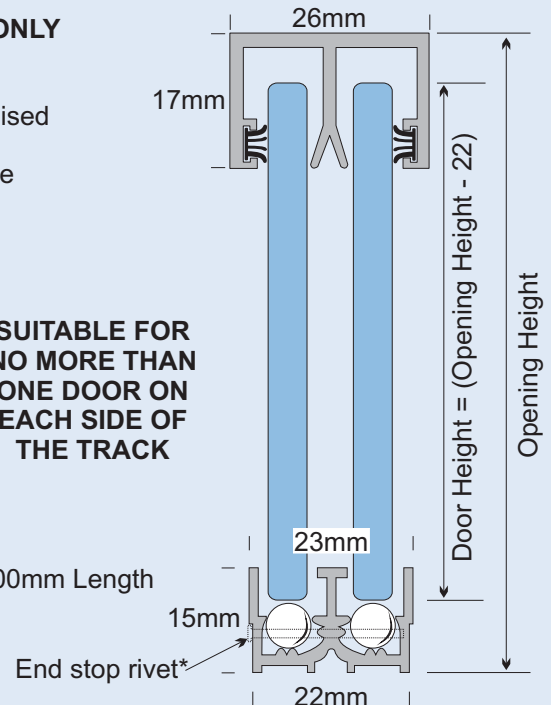

Recommended number of Balls  
is equal to 55% of track **PER DOOR**  
(or 92 balls per metre per door)


\*End stop rivet is only required when doors have an open end(s).

# PLASTIC TRACK Sliding Door System

## Double Track for 5mm Glass or Mirror Panels

Cowdroy Plastic Tracks are ready to use and are easy to install. Both the Head Guide and Track are the same width to permit identical grooving to the top and bottom of the opening. The Track is supplied with pre-drilled pin holes for easy fixing. This track is also suitable for 5mm thick hardboard panels.

**DESIGNED FOR INTERNAL USE ONLY**

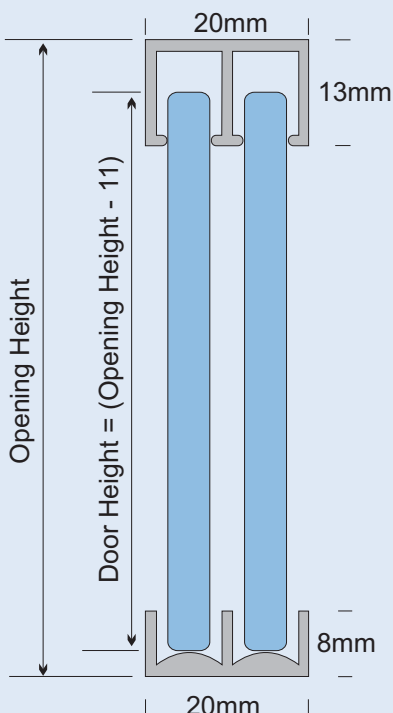

**RECOMMENDED GLASS SPECIFICATIONS:**

Maximum Sizes:  
**0.562 Sq mt ea Panel**  
**760mm High**  
Overlap: As desired

**Vertical Edges must be polished.**  
**Bottom Edge MUST be polished**  
**and corners MUST be rounded to**  
**10mm radius**

Plastic Double Headguide

Plastic Double Track

**Headguide and Track should ALWAYS be  
MOUNTED PLUMB and to FIRM, LEVEL SURFACES**

Available Only As Pre-packaged Sets

<b>P26</b>	Packaged set for 2 doors - 1200mm Opening White or Brown
<b>P26</b>	Packaged set for 2 doors - 1800mm Opening White or Brown